

PK20-E

2 POST LIFT



**7/8" Fork Lift Mast Steel
4" Sealed Steel Roller Bearings**



LIFETIME
Sealed Steel Roller Bearings

- **Double telescoping 3 piece adjustable lifting arms with low pad clearance of 5 1/2"**
- **Most versatile and adaptable lift for the widest range of vehicles made today.**



Listed

- **CLEAR FLOOR**
- **FORK LIFT MAST STEEL COLUMNS**
- **4" SEALED STEEL CARRIAGE ROLLERS**
- **NO OVERHEAD BEAM OBSTRUCTION**
- **NO EQUALIZING CABLES**
- **LOW PROFILE PAD CLEARANCE**
- **GEAR & SPROCKET ARM RESTRAINTS**
- **2HP MOTOR /PUMP**
- **SINGLE POINT ELECTRIC**



CAPACITY	LIFTING HEIGHT	REQUIRED CEILING HEIGHT	MOTOR/ VOLTAGE	OPTIONAL VOLTAGE
18,000lbs.	85"	160"	2HP/ single phase, 208-230V	3 phase, 230-460V
20,000lbs	85"	160"	2HP/ single phase, 208-230V	3 phase, 230-460V

PKS Equipment & Engineering Inc.

1240 Osprey Dr.

Ancaster Ontario


Canada L9G4V5

905-648-7797

WWW.PKSLIFTS.COM



TWO-POST LIFT MODEL: PK20

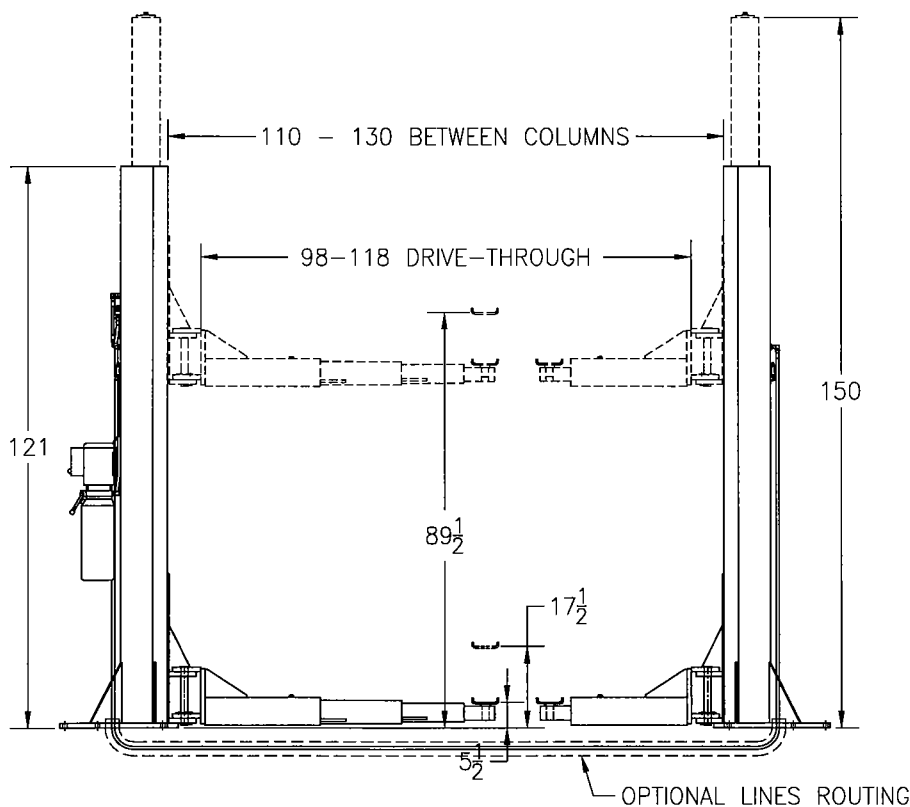

CAPACITY: 20,000 LBS

RISE: 89-1/2"

CEILING HEIGHT
REQUIRED: 160"MIN.


MOTORS: 2 HP

VOLTAGE 1 Ph.: 208-230V

VOLTAGE 3 Ph.: 230-460V

VOLTAGE 3 Ph.: 575V

HIGHT ADAPTERS

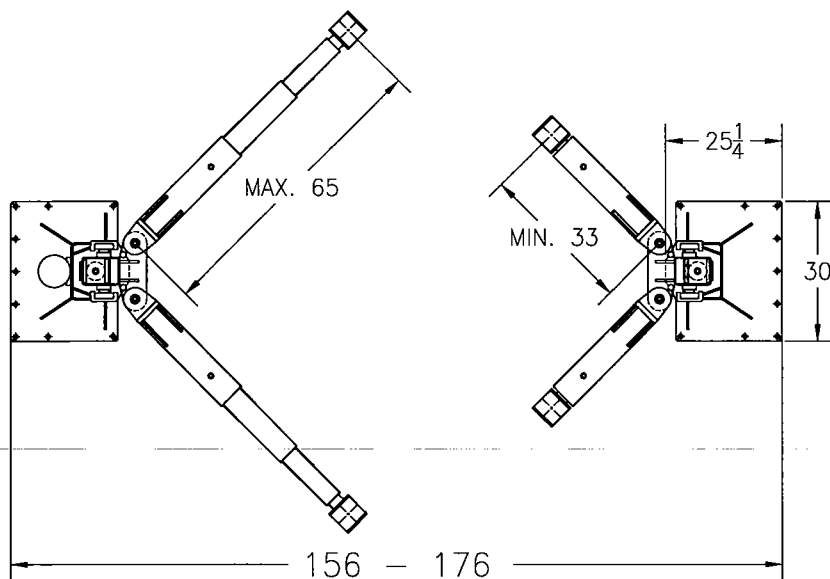

FEATURES:

1. AIR/HYDRAULIC CONTROL
2. CLEAR FLOOR
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. A SINGLE POINT LOCK RELEASE
7. ARM RESTRAIN

DWN.
JK
APPR.
KK

P K S


APR.18/2006

DWG

PK20SPEC

A

TWO-POST LIFT MODEL: PK20

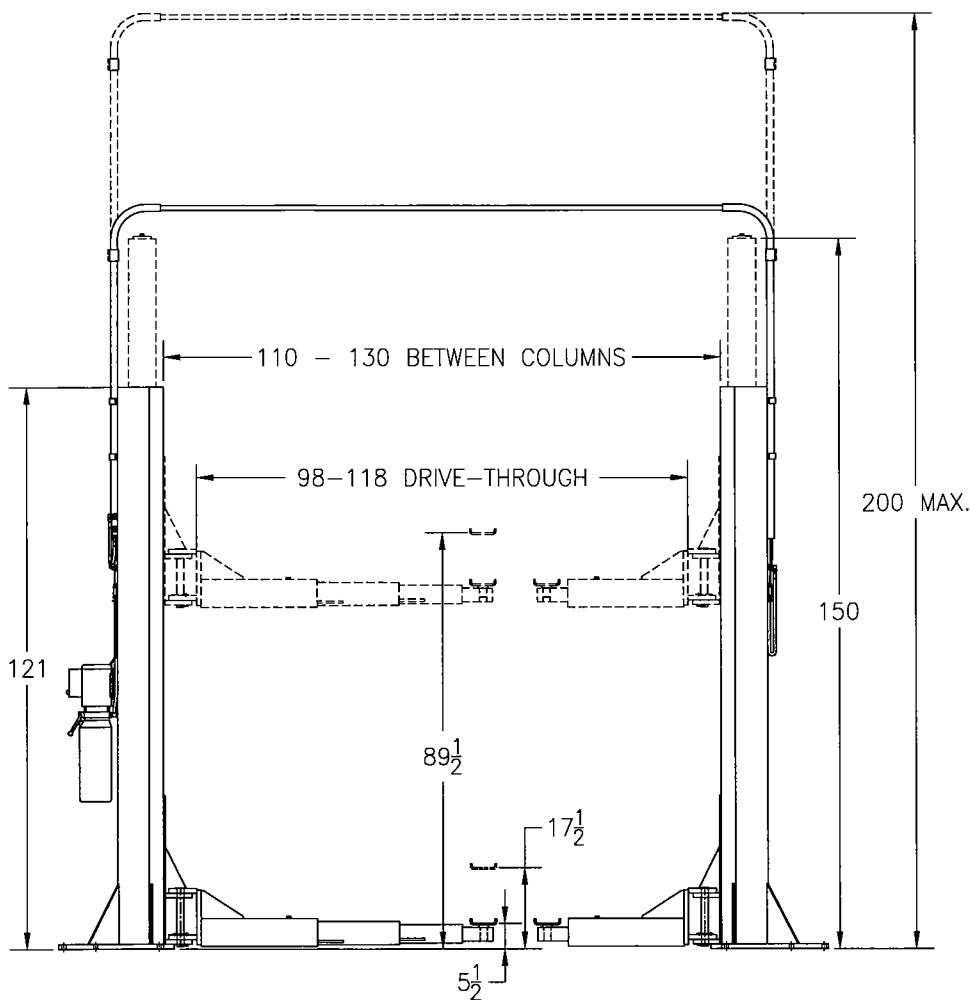

CAPACITY: 20,000 LBS

RISE: 89-1/2"

CEILING HEIGHT
REQUIRED: 160" MIN.


MOTORS: 2 HP

VOLTAGE 1 Ph.: 208-230V

VOLTAGE 3 Ph.: 230-460V

VOLTAGE 3 Ph.: 575V

HIGHT ADAPTERS

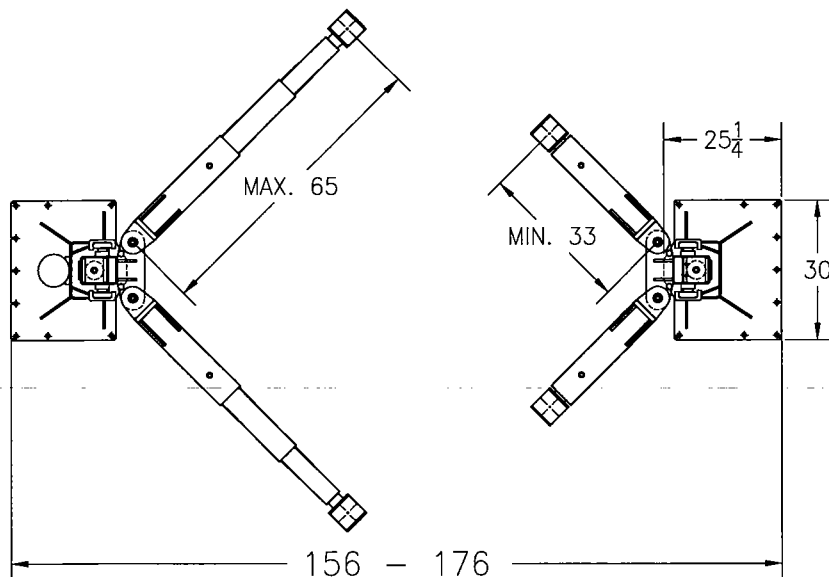

FEATURES:

1. AIR/HYDRAULIC CONTROL
2. CLEAR FLOOR
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. A SINGLE POINT LOCK RELEASE
7. ARM RESTRAIN

DWN.
JK
APPR.
KK

P K S

APR.18/2006

DWG

PK20SPEC

A

TWO-POST LIFT MODEL: PK20E

CAPACITY: 20,000 LBS

RISE: 89-1/2"

CEILING HEIGHT
REQUIRED: 160" MIN



MOTORS: 2 x 2HP

VOLTAGE 1 Ph.: 208-230V

VOLTAGE 3 Ph.: 230-460V

VOLTAGE 3 Ph.: 575V

HIGHT ADAPTERS

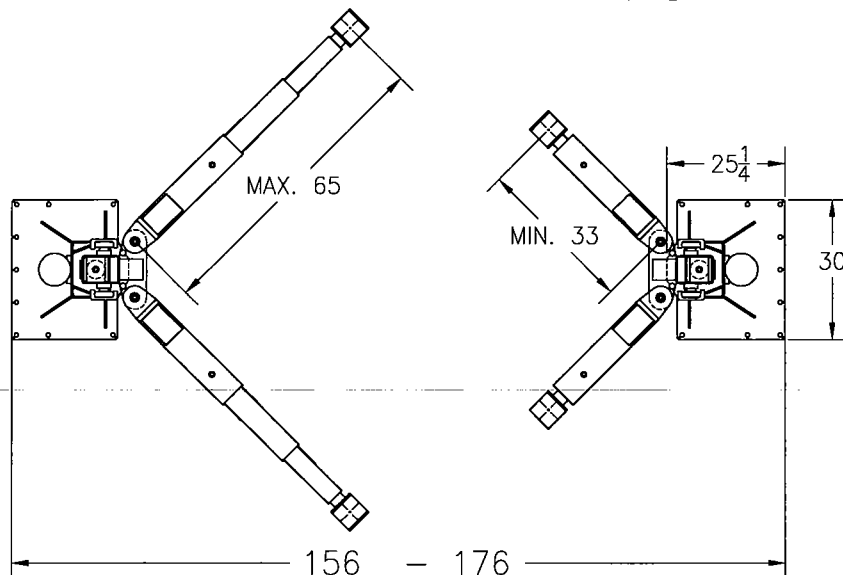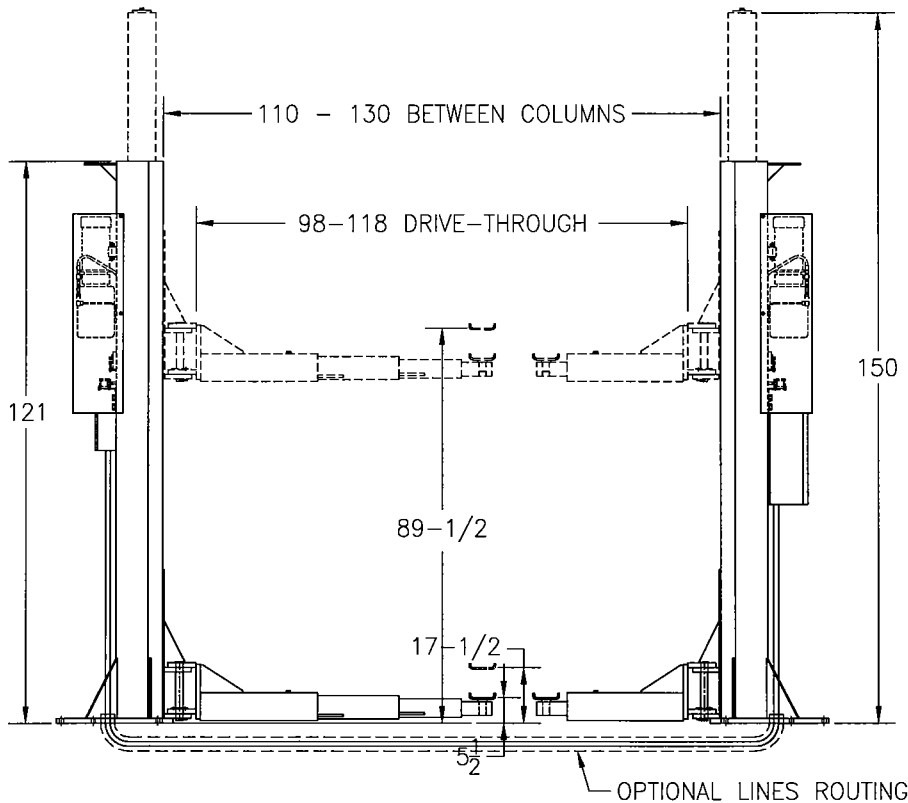

FEATURES:

1. ELECTRONICALLY CONTROL
2. CLEAR FLOOR
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. A SINGLE POINT LOCK RELEASE
7. ARM RESTRAIN

P K S


SEP.05/2006

DWG

PK20ESPEC

A

TWO-POST LIFT MODEL: PK20E

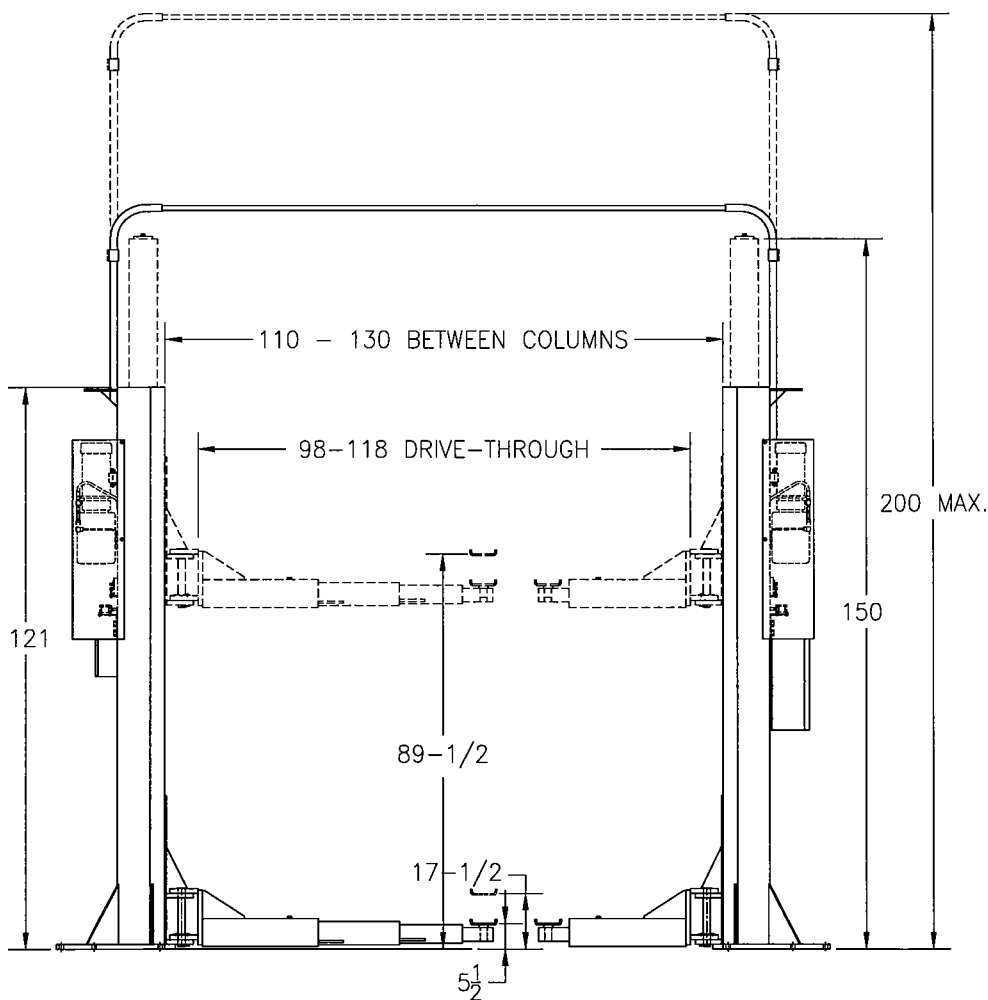

CAPACITY: 20,000 LBS

RISE: 89-1/2"

CEILING HEIGHT
REQUIRED: 160"MIN


MOTORS: 2 x 2HP

VOLTAGE 1 Ph.: 208-230V

VOLTAGE 3 Ph.: 230-460V

VOLTAGE 3 Ph.: 575V

HIGHT ADAPTERS

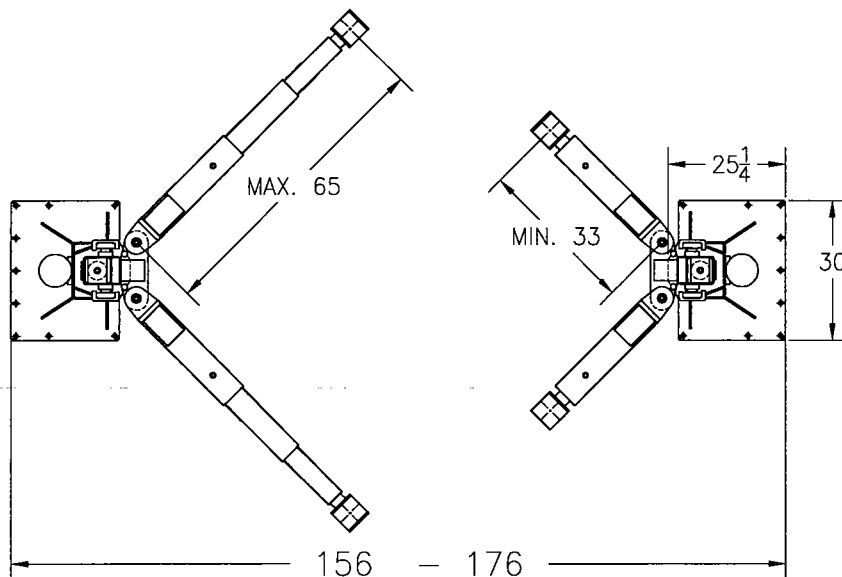

FEATURES:

1. ELECTRONICALLY CONTROL
2. CLEAR FLOOR
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. A SINGLE POINT LOCK RELEASE
7. ARM RESTRAIN