


**7/8" Fork Lift Mast Steel
4" Sealed Steel Roller Bearings**



PK22-E
22,000 lb capacity



- **Optional INFRARED SENSOR** sends signal to PLC if raise limit is reached preventing damage to the vehicle
- **Double telescoping 3 piece adjustable lifting arms** with low pad clearance of 5 1/2"
- **Most versatile and adaptable lift** for the widest range of vehicles made today.
- **Advanced PLC based control** ensures operator safety
- **Single point electric solenoid locks** automatically engage
- **Synchronized lifting arm raising** using proximity sensors
- **Automatic operation halt** during faulty and displays warning light
- **Twin 2HP motors** conserve energy and reduce hydraulic

HEAVY DUTY ELECTRONIC EQUALIZED

PKS EQUIPMENT & ENGINEERING INC.

NEW ELECTRONIC EQUALIZATION PLC COMPUTER CONTROLLED THE 2-POST LIFT WITH A "BRAIN"

- ***CLEAR FLOOR***
- ***FORK LIFT MAST STEEL COLUMNS***
- ***4" SEALED STEEL CARRIAGE ROLLERS***
- ***NO OVERHEAD BEAM OBSTRUCTION***
- ***NO EQUALIZING CABLES***
- ***LOW PROFILE PAD CLEARANCE***
- ***GEAR & SPROCKET ARM RESTRAINTS***
- ***TWIN 2HP MOTORS/PUMPS***
- ***SINGLE POINT ELECTRIC***



TWO-POST LIFT MODEL: PK22E

CAPACITY: 22,000 LBS

RISE: 89-1/2"

CEILING HEIGHT
REQUIRED: 160"MIN



MOTORS: 2 x 2HP

VOLTAGE 1 Ph.: 208-230V

VOLTAGE 3 Ph.: 230-460V

VOLTAGE 3 Ph.: 575V

HIGHT ADAPTERS

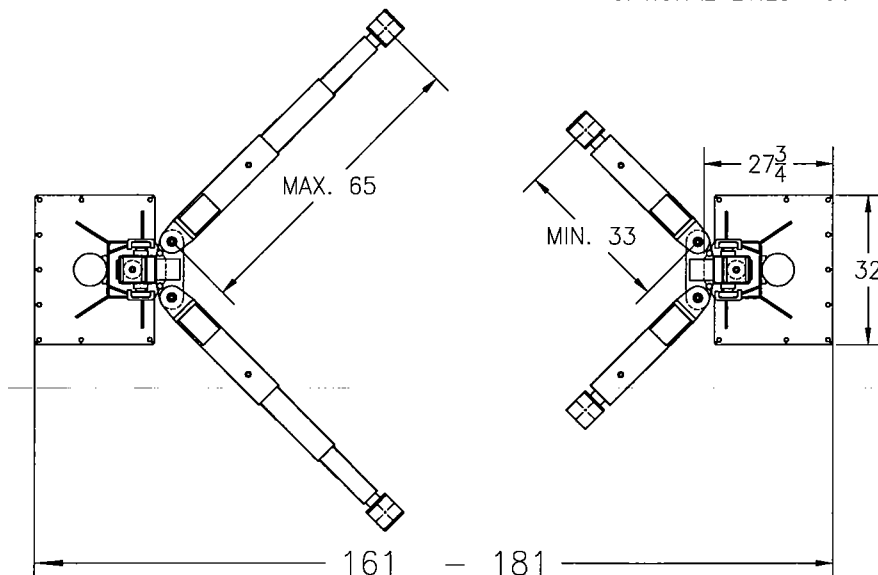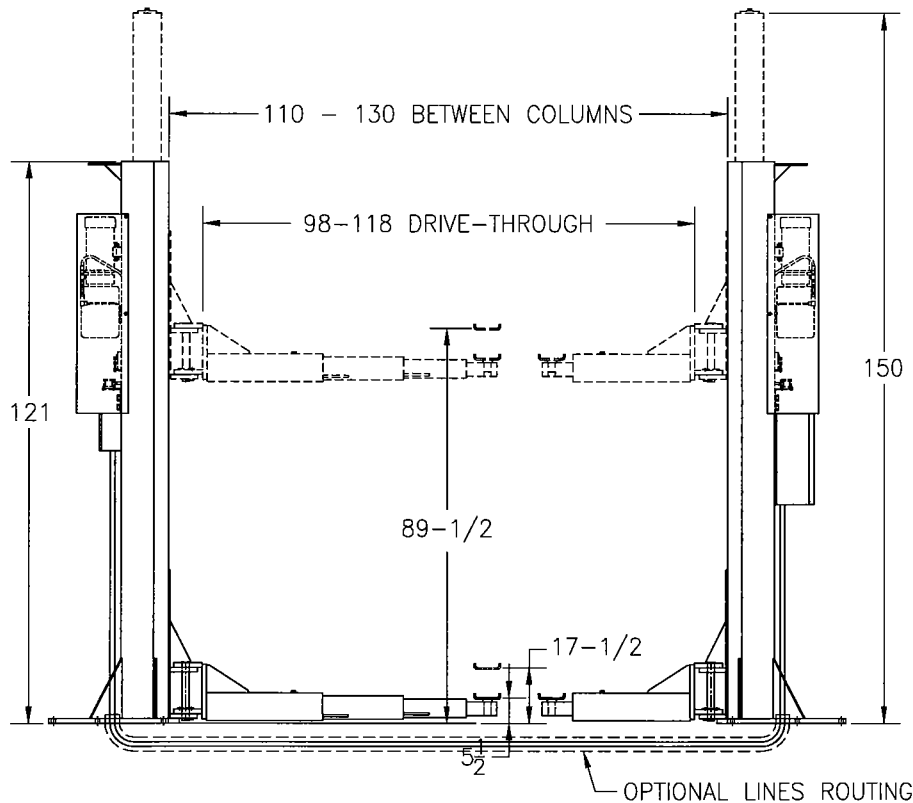

FEATURES:

1. ELECTRONICALLY CONTROL
2. CLEAR FLOOR
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. A SINGLE POINT LOCK RELEASE
7. ARM RESTRAIN

P K S


MAY 01/2006

DWG

PK22ESPEC

A

TWO-POST LIFT MODEL: PK22E

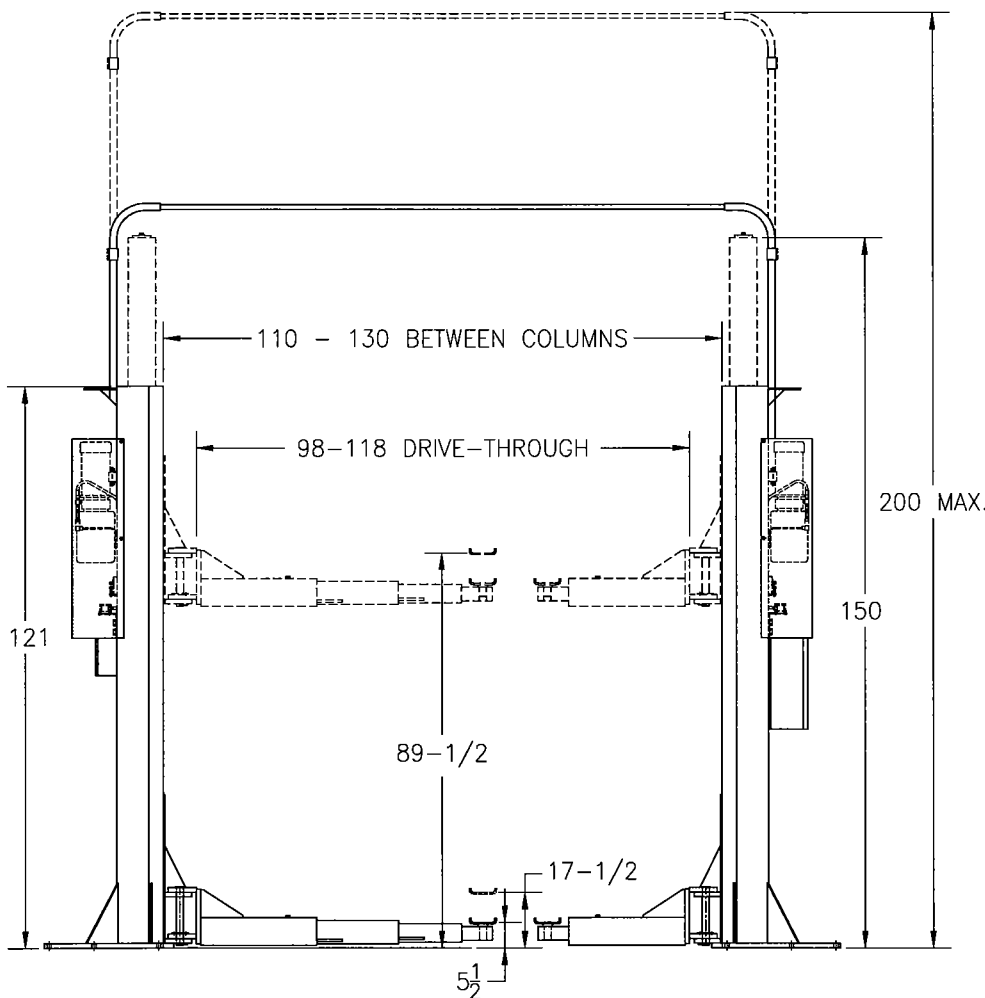

CAPACITY: 22,000 LBS

RISE: 89-1/2"

CEILING HEIGHT
REQUIRED: 160"MIN

MOTORS: 2 x 2HP

VOLTAGE 1 Ph.: 208-230V


VOLTAGE 3 Ph.: 230-460V

VOLTAGE 3 Ph.: 575V

HIGHT ADAPTERS

FEATURES:

1. ELECTRONICALLY CONTROL
2. CLEAR FLOOR
3. NO OVERHEAD BEAM
4. NO EQUALIZING CABLES
5. LOW PROFILE ARMS
6. A SINGLE POINT LOCK RELEASE
7. ARM RESTRAIN

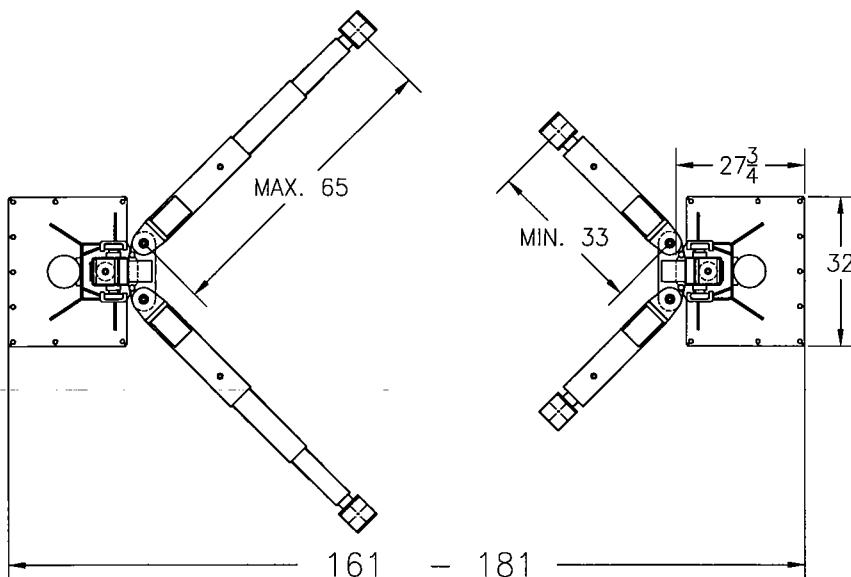

P K S

MAY 01/2006

DWG

PK22ESPEC

A